


Belting Edge 2ply Diamond Top PVC FDA White

BELT TECHNICAL DATA SHEET

BELT CONSTRUCTION: Two ply polyester, PVC white inverted pyramid profile top cover 65 shore A, impregnated underside.

| | |
|------------------------------------|-------------------------------|
| Colour | White |
| Belt Thickness | 2.5mm |
| Top Cover Thickness | 0.5mm |
| Bottom Cover Thickness | N/A |
| Belt Weight | 2.4 kg/m ² |
| Coefficient of friction (On steel) | 0.15 |
| Minimum pulley Diameter | 50mm (at ambient temperature) |
| Minimum back flex Diameter | 60mm (at ambient temperature) |
| Belt Factor | 8 N/mm at 1% stretch |
| Temperature Range | -10 to + 90 Deg C |
| Food Rating | FDA |
| Carcass construction | Rigid |
| Stock width | 2000mm |
| Manufactured width | 2000mm |

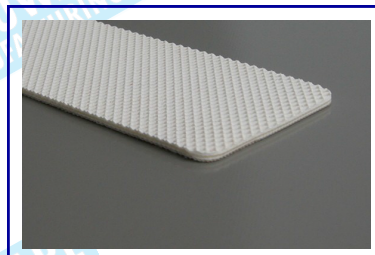

| | |
|----------------------|---------------------------|
| Recommended Splice | Lap or finger splice |
| Recommended fastener | UX1 s/steel or 62 s/steel |

| | |
|----------------------|---|
| Belt Characteristics | <p>Dimensionally stable and laterally rigid</p> <p>Suitable for longitudinal or lateral profiles</p> <p>High degree of oil and fat resistance</p> <p>Weather and ozone resistant</p> <p>Excellent tracking properties, wide belts run perfectly flat</p> <p>Unaffected by grease, moisture and humidity</p> |
|----------------------|---|

| | |
|----------------------|--|
| Typical Applications | <p>Bread / dough conveying where oil aids release</p> <p>Deep frozen meat, poultry and fish</p> <p>Food products, bakery, confectionary and Pharmaceutical</p> <p>Fruit, vegetable and agricultural applications</p> <p>Metal detector</p> <p>Packaging conveyors / box handling</p> |
|----------------------|--|