


## Belting Edge - 2ply Sawtooth FDA White

### BELT TECHNICAL DATA SHEET

**BELT CONSTRUCTION:** Two ply polyester, PVC white top cover with Saw Tooth 55 shore A, low friction underside

Colour	White
Belt Thickness	5.60mm
Top Cover Thickness	3.4mm
Bottom Cover Thickness	0.5mm
Belt Weight	5.3kg/m <sup>2</sup>
Coefficient of friction (On steel)	0.30
Minimum pulley Diameter	100mm (at ambient temperature)
Minimum back flex Diameter	150mm (at ambient temperature)
Belt Factor	12 N/mm at 1% stretch
Temperature Range	-10 to + 80 Deg C
Food Rating	FDA
Carcass construction	Flexible
Stock width	2000mm
Manufactured width	3000mm

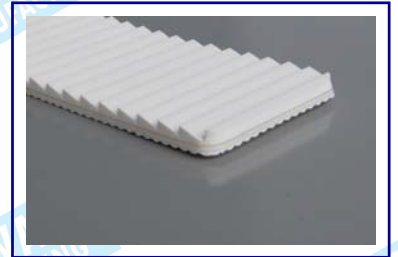

Recommended Splice	Lap splice
Recommended fastener	U2 or 125

<b>Belt Characteristics</b>	<p>Abrasion resistant and shock absorbing thick top cover</p> <p>Excellent tracking properties</p> <p>Suitable for longitudinal profiles</p> <p>High degree of oil and fat resistance</p> <p>Weather and ozone resistant</p> <p>Unaffected by grease, moisture and humidity, sealed underside</p>
-----------------------------	---

<b>Typical Applications</b>	<p>Incline conveying of meat/poultry, fish and dairy</p> <p>Food products, bakery, confectionary and pharmaceutical</p> <p>Fruit, vegetable and agricultural applications</p> <p>Leaf products such as tobacco or tea</p> <p>Packaging conveyors / box handling</p>
-----------------------------	---